


# DEAN

deanequipment.com

## THE ARTICULATOR 5000

Precise and Safe Handling

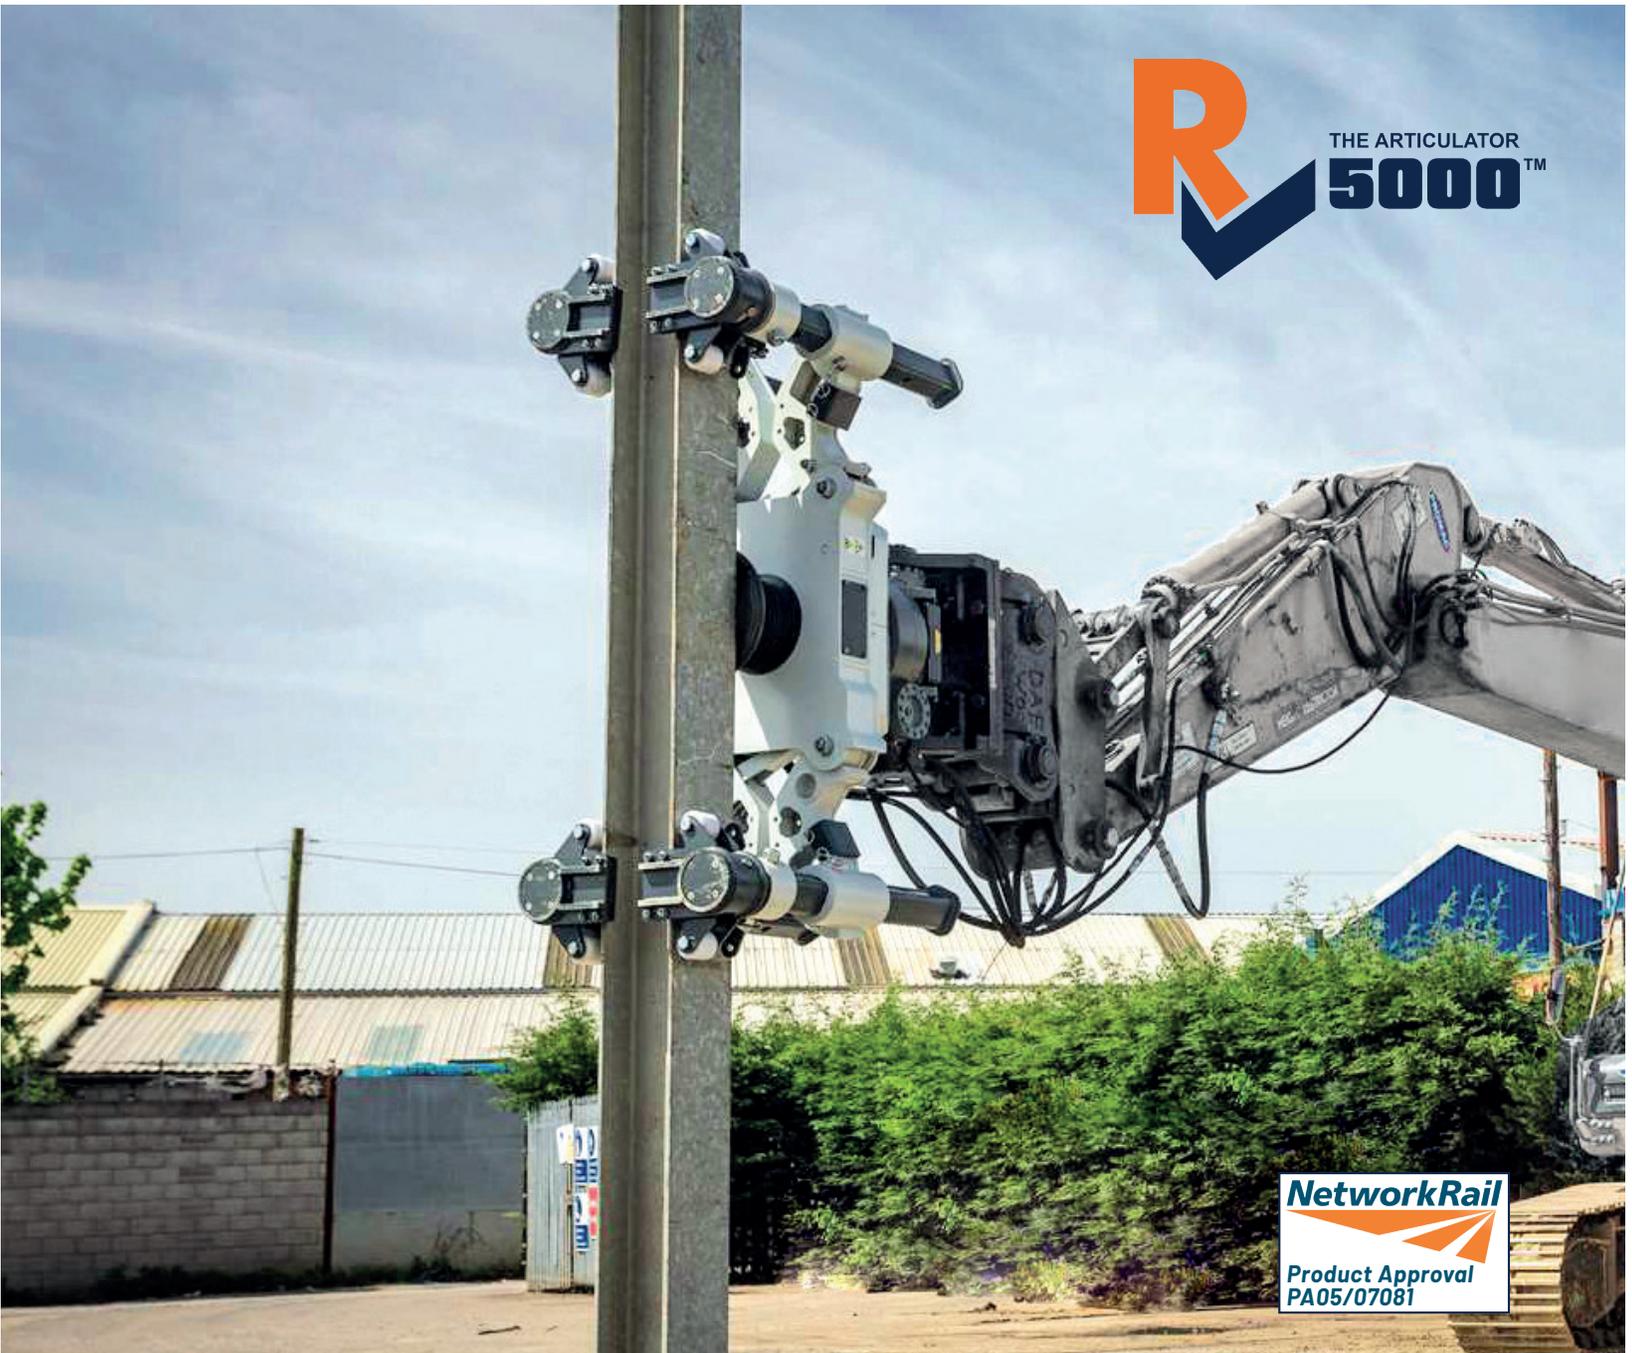

Tel: +44 (0)1474 328900 Email: [sales@deanequipment.com](mailto:sales@deanequipment.com)

# THE ARTICULATOR 5000

With a maximum lift/SWL of 5 tonnes, the Articulator 5000 is capable of manipulating, manoeuvring and rotating sections, poles, masts and posts up to 20m length\*.

With its four uniquely adjustable feet and telescopic legs, the Articulator 5000 can adjust to various changes in width and size and remain sturdy and safe.

- ▶ Lifts regular or tapered structures of varying widths, clamping and holding securely – for safe and precise positioning.
- ▶ Lifts tubular structures and all round sections up to 795mm diameter and 20m in length\*.
- ▶ Handles parallel or tapered box sections, square, oblong or H-beam etc. and of various other sectional characteristics up to 850mm width and 20m in length\*.
- ▶ 360° endless rotation included.
- ▶ Shown featuring the **NOX** Tiltrotator.

\* Subject to load being held at its center of gravity



Dimensions						
Height with legs extended (mm)	Height with legs retracted (mm)	Length/width arms open (mm)	Length/width arms closed (mm)	Diam. max. round section (mm)	Dims. max. angular section (mm)	Height max. of object (mm)
1915	1345	1840 / 1515	2230 / 670	795	850	720

Angles / Speeds					
Tilt left / right (°)	Rotation speed** (RPM)	Lateral arm closing speed** (m/sec)	Lateral arm opening speed** (m/sec)	Centre clamping pad retract speed** (m/sec)	Centre clamping pad extend speed** (m/sec)
50 / 50	8.5	1.39	2.06	0.295	0.531

\*\* @ 50 l/min

Forces / Electrics				
Lateral legs combined*** (kN)	Lateral arms combined**** (kN)	Centre clamping pad*** (kN)	Centre clamping pad**** (kN)	Supply required (V)
36.8	49.0	50.89	62.20	12 / 24

\*\*\* @ 180 bar      \*\*\*\* @ 240 bar

Hydraulic Requirements Tilt / Rotation						
Two double acting circuits required						
Tilt torque @240 bar (kN)	Tilt oil flow (l/min)	Tilt pressure (bar)	Tilt hydr. power input (max. kW)	Rotation oil flow (l/min)	Rotation pressure (bar)	Rotation hydr. power input (max. kW)
24.4	20 - 50	180 - 240	20	20 - 70	120 - 200	23

Hydraulic Requirements Centre Clamping Pad		
Oil flow range (l/min)	Pressure range (bar)	Hydraulic power input (max. kW)
20 - 70	120 - 200	23



DEAN Equipment Ltd reserves the right to amend specifications without prior notice. E&OE. IPR Dean, GB1809398.9